

Price Lake Generator Startup & Shutdown Instructions

1. Remove South generator door
2. Move fuel pump switch to on (pictured below)



4. Put start switch to ON



6. Move choke to NO CHOKE. LET GENERATOR WARM UP FOR 2-3 MINUTES BEFORE PROCEEDING!!!



7. Hook up extension cord on generator end




8. run the extension cord through white PVC pipe below to the right.



9. Hook up extension cord to house end (transfer switch)



10. Pull down transfer switch (red lever) to AUX (AUX = backup generator power)

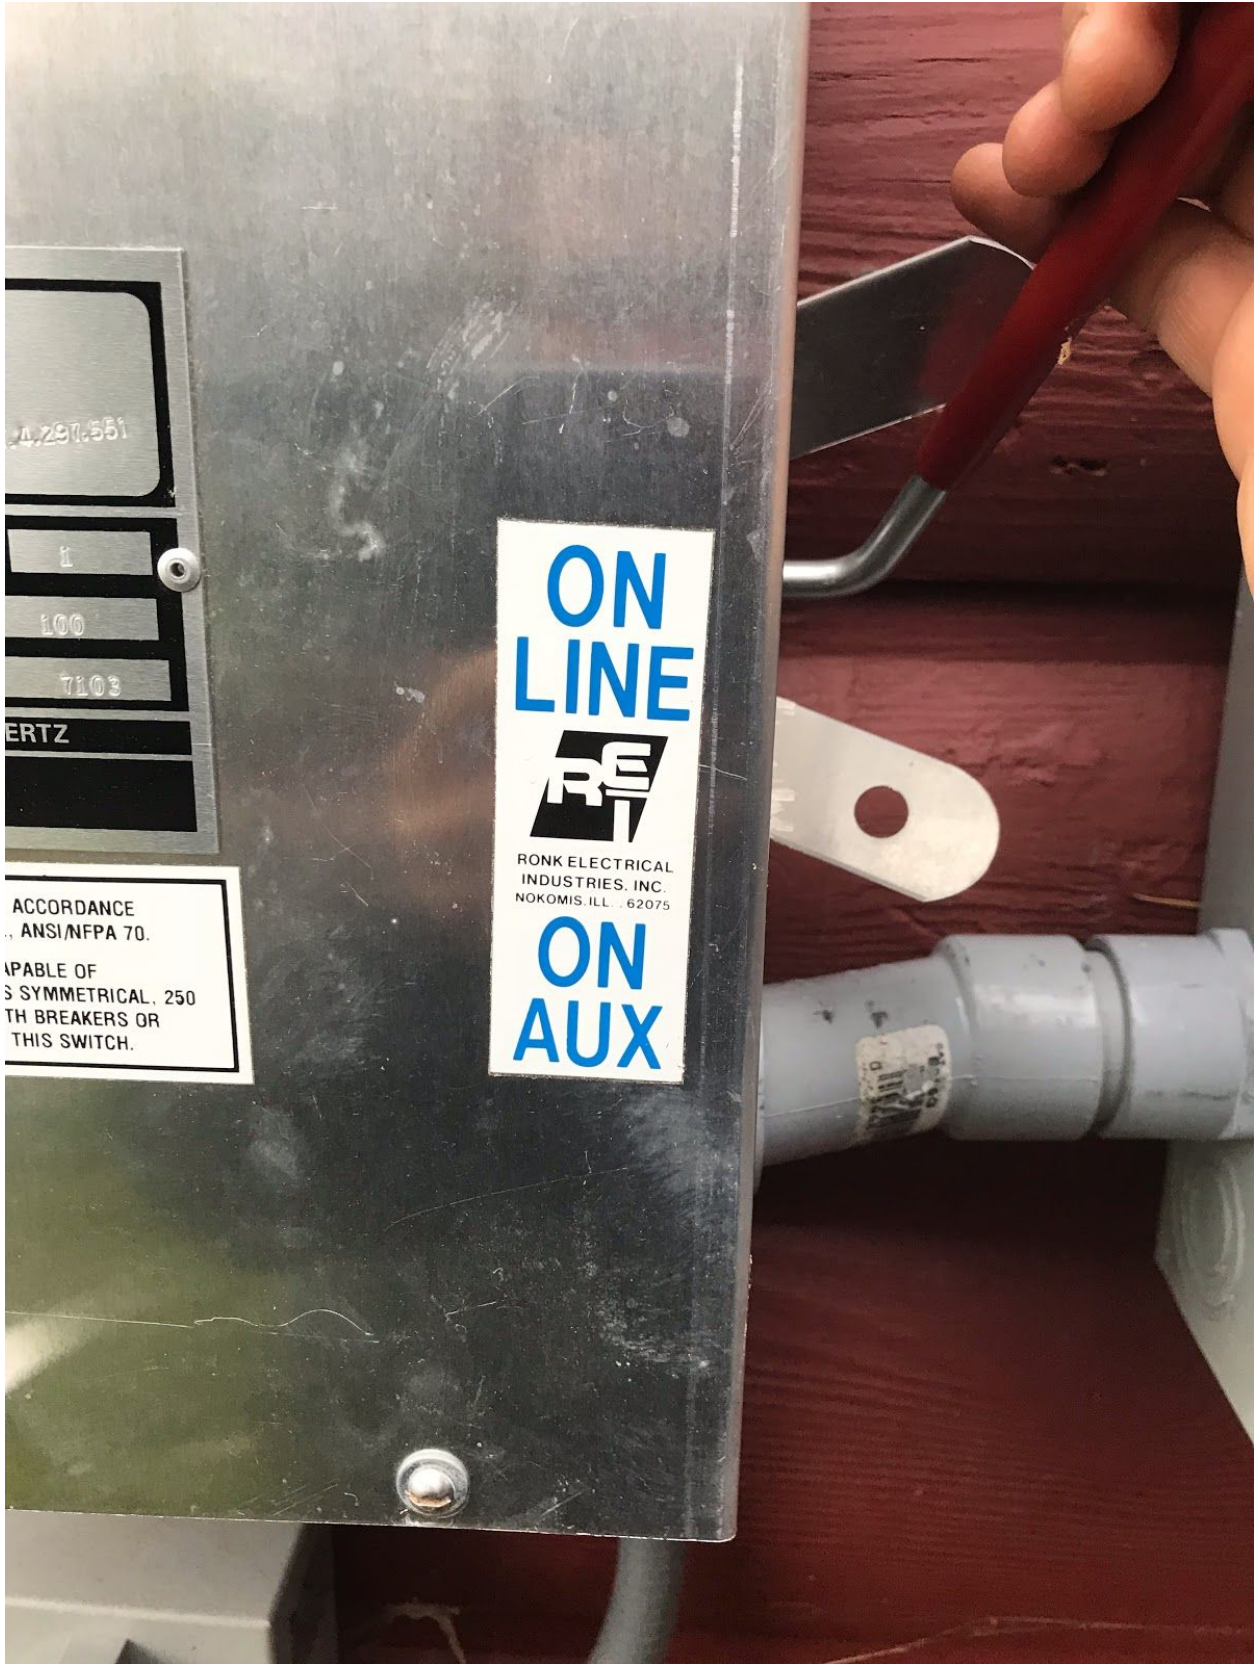

Generator Shutdown

1. Switch red lever back to ON LINE.



2. Unplug extension cord on house end



3. Let generator wind down for 2-3 minutes (no electrical load on it)
4. Switch red power switch to OFF



5. Move fuel pump switch to OFF



4. Put away extension cord & put cover back on